



Inrico S300 4G PoC Radio

Terminal Default Buttons using iConvNet PTT App




version 8.1

Guide

- Short press
- Long press

- Lock/Unlock
- Power (on/off)
- PTT Button
- Volume Up
- Volume Down

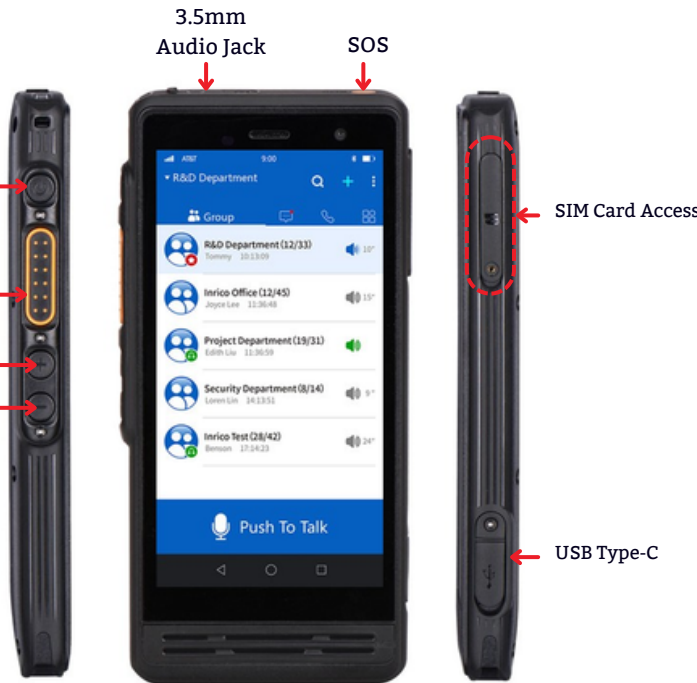

Tested Accessories



LC-300
Inrico S300
Leather Case



BP01
Inrico Bluetooth
PTT Button



B01
Inrico Bluetooth
Microphone



Please note: Inrico PoC radios offer programmable buttons, allowing customization for different functions and requirements through the iConvNet PTT App. Keep in mind that the button configurations may vary when using alternative apps.

Connection

Canada and US Version	GSM: B2/B3/B5/B8 WCDMA: B1,B2,B4,B5,B8 FDD-LTE: B2,B4,B7,B12,B17,B28A,B28B,B66
Wi-Fi	IEEE 802.11 a/b/g/n, 2.4G & 5G Dual Band
Bluetooth	BT4.0
Navigation	GPS, AGPS, GLONASS (BEIDOU can be customized)
NFC	Support

Hardware

CPU	MT6739, 1.5GHz, 4 cores
RAM + ROM	2GB+ 16GB
Expand Memory	Optional, up to 32G
Card Slot	Dual Nano SIM card + TF card
USB Port	Type-C
Interface	3.5mm
Screen Size	5 inches, G + FF multi-touch (Corning Gorilla 3)
Camera	Front Camera: 5.0MP, Rear Camera: 13.0MP
Speaker	Ø25*35mm, 8Ω 3W
Microphone	Anti-interference MIC
Battery	4600mAh
Working Times	20 Hours (5/5/90 standard test)
Standby Times	30 Hours
Dimension (H*W*D)	156.8 x 75.7 x 16mm (Without Antenna and Belt clip)
Weight	≈245g
Working Temp.	-10°C ~ 55°C
Storage Temp.	-20°C ~ 60°C
Flashlight	Support

Certification

Ingress Protection	IP67
Drop Certification	1.2 Meter CE/FCC/ROHS